




Product information

OpDAT fix / OpDAT slide

Illustrations

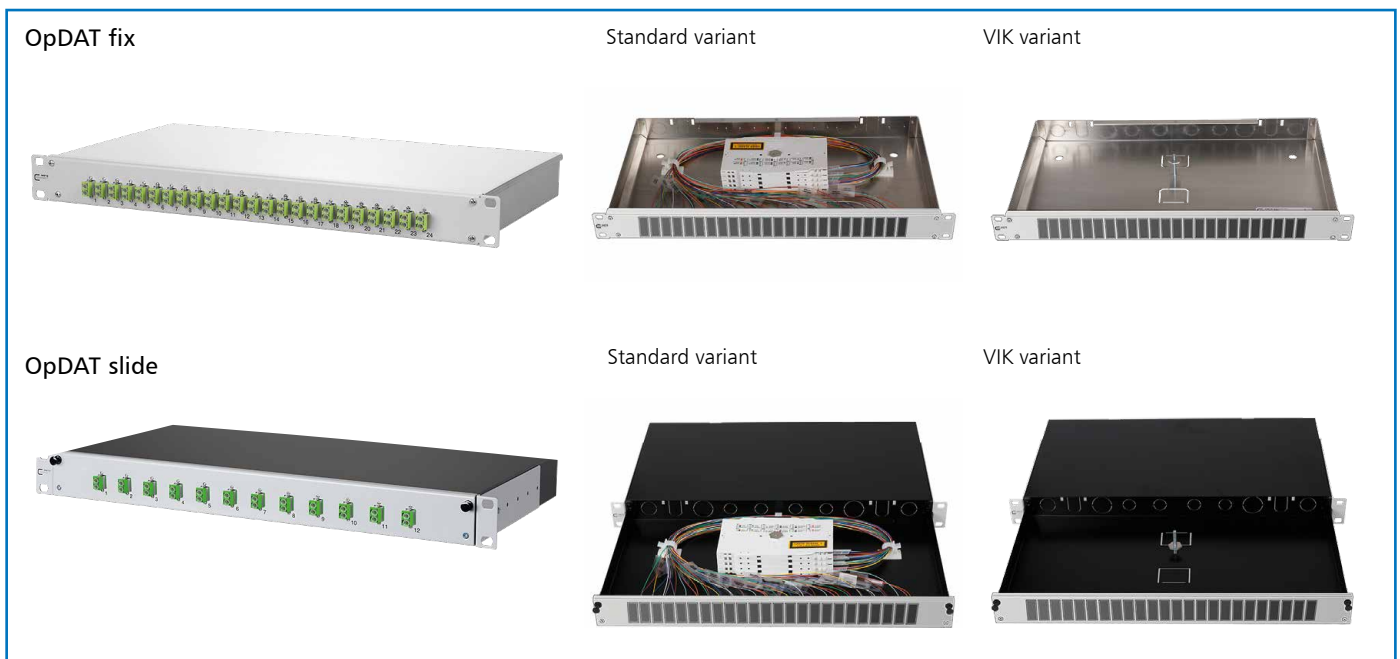


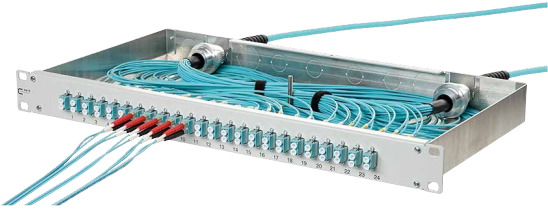


Product description

- Fiber optic patch panels for 19-inch systems, 1 rack unit (RU)
- Service-friendly mounting by removable cover or an extendible drawer
- Light construction with steel sheet front plate
- Front plates available in gray (RAL 7035) or black (RAL 9005)
- All front plates are available with 12 or 24 adapter cutouts. Unused cutouts in the front plate are covered by blank plugs
- Available with the following adapters: LC, SC, E2000 and ST in duplex version. All adapters with ceramic sleeves. Other types available on demand.
- Pigtailed are available with fiber types OM3, OM4, OM5 and OS2. All pigtailed are inspected and cleaned before inserted into the adapters according to IEC 61300-3-35
- All standard patch panels are available with holders for crimp splice or shrink splice protections.
- The rear panel has 10 options for cable insertion: 4xPG13.5, 2x PG16/M20, 2x PG21/M25, 2x U-shaped cutouts for VIK.
- OpDAT slide panels allow also recessed mounting



Product information OpDAT fix / OpDAT slide

OpDAT fix and OpDAT slide patch panels are both available in two variants.

Standard variant	VIK variant
<ul style="list-style-type: none"> • Equipped with pigtails and adapters • Pigtails inserted to splice trays with splice holders, ready to splice. • Pigtail plugs are cleaned and inserted into adapters, assignment according to color code of IEC 60304 • Included in delivery: <ul style="list-style-type: none"> - one cable gland PG16 - more PG cable glands are available as accessory 	<ul style="list-style-type: none"> • Equipped with adapters • Prepared for toolless fixation of pre-terminated installation cables (OpDAT VIK) in U-shaped cutouts. • Included in delivery: <ul style="list-style-type: none"> - two mounting plates - more mounting plates are available as accessory
	
	


Product information OpDAT fix / OpDAT slide

2017-11-24

	OpDAT fix		OpDAT slide		
Characteristics	<ul style="list-style-type: none"> for fixed installation removable front plate 		<ul style="list-style-type: none"> with completely extendible splice tray with drawer stop that prevents the drawer from being completely removed accidentally for recessed mounting 		
Equipped with	Adapters	Pigtails	Adapters	Pigtails	
Standard variant	SC Duplex	6 12 24	12 24 48	6 12 24	12 24 48
	LC Duplex	6 12 24	12 24 48	6 12 24	12 24 48
	ST Duplex	6 12 24	12 24 48	6 12 24	12 24 48
	E2000 Duplex	6 12 24	12 24 48	6 12 24	12 24 48
	VIK variant	SC Duplex	6 12 24	- - -	6 12 24
	LC Duplex	6 12 24	- - -	6 12 24	- - -
	ST Duplex	6 12 24	- - -	6 12 24	- - -
	E2000 Duplex	12 24	- -	12 24	- -
Dimension for fixation	465 mm				
Dimension for mounting (LxHxW)	384 x 1RU x 240 mm				

Accessories	Part number	
Cable gland	PG13.5 (clamping range 6 - 11 mm)	150811P13-E
	PG16 (clamping range 7 - 12 mm)	150811P16-E
	PG21 (clamping range 9 - 16 mm)	150811P21-E
Mounting plate VIK	15081106-E	
Crimp splice protection	15090401-E (12 pieces per packaging unit)	
	15090401-I (150 pieces per packaging unit)	
Shrink splice protection	15090402-I (12 pieces per packaging unit)	

Part number key for other versions:

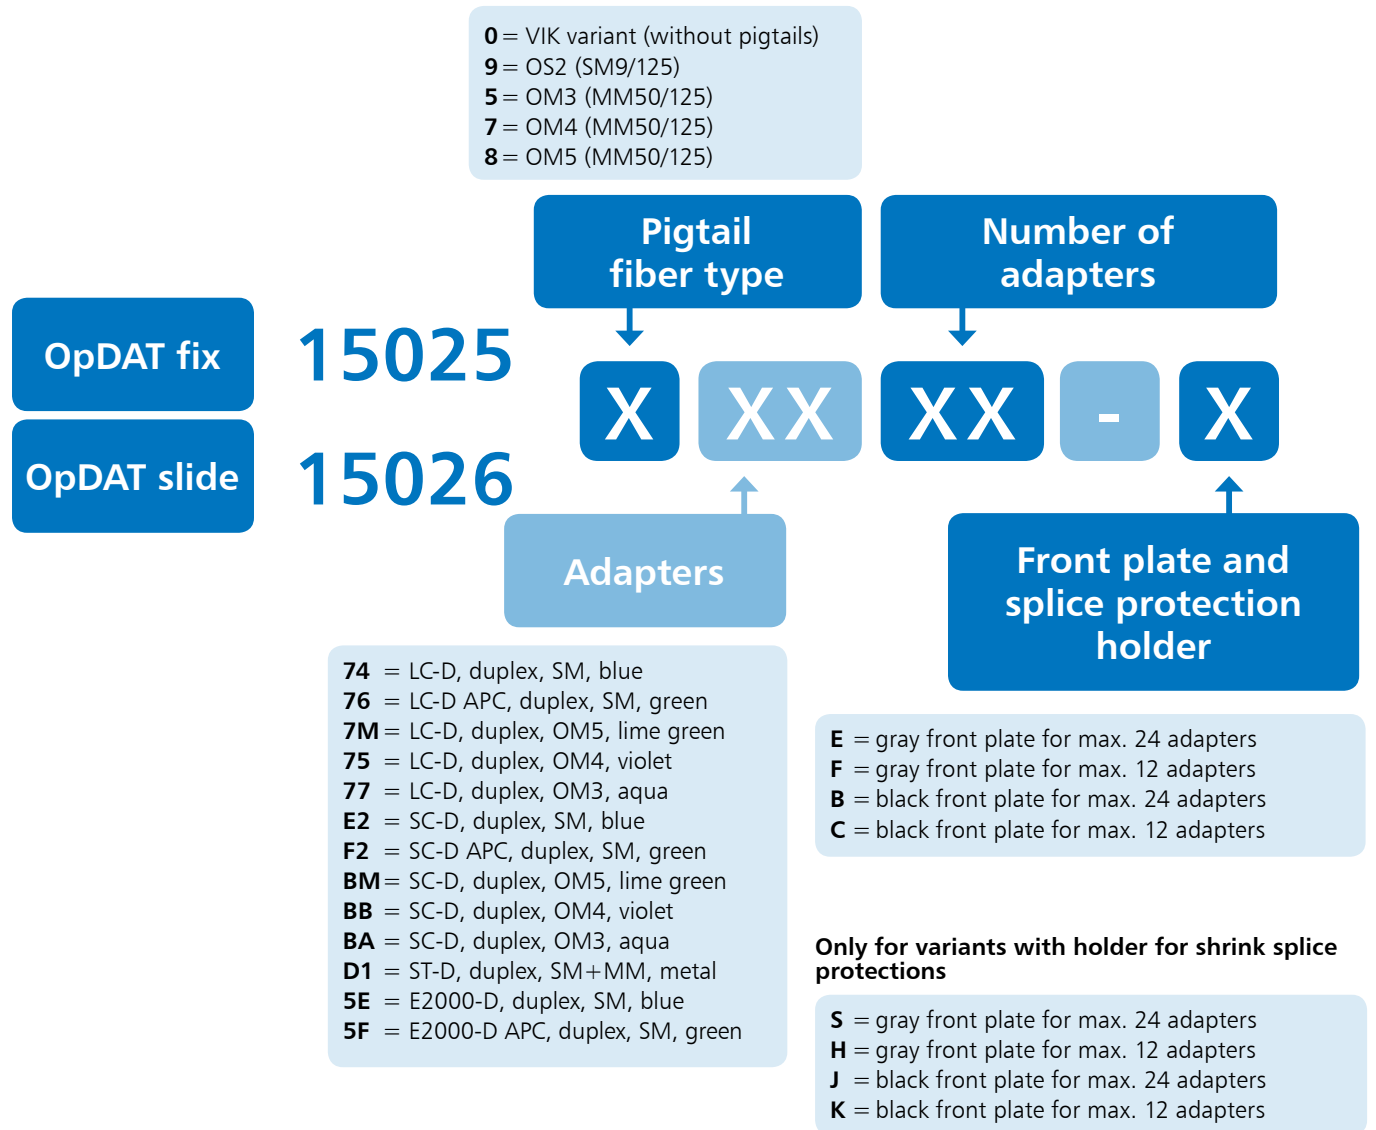

Further combinations can be configured with our patch panel configurator:
www.metz-connect.com/en/configurator-fiber-optic-patch-panels

